



INDUSTRIAL SERIES

High impedance : 50 Ω
 Paper cone
 Corrugated suspension
 Shallow chassis
 High temperature voice coil

Impédance élevée : 50 Ω
 Cône papier
 Suspension corruguée
 Profondeur réduite
 Bobine haute température

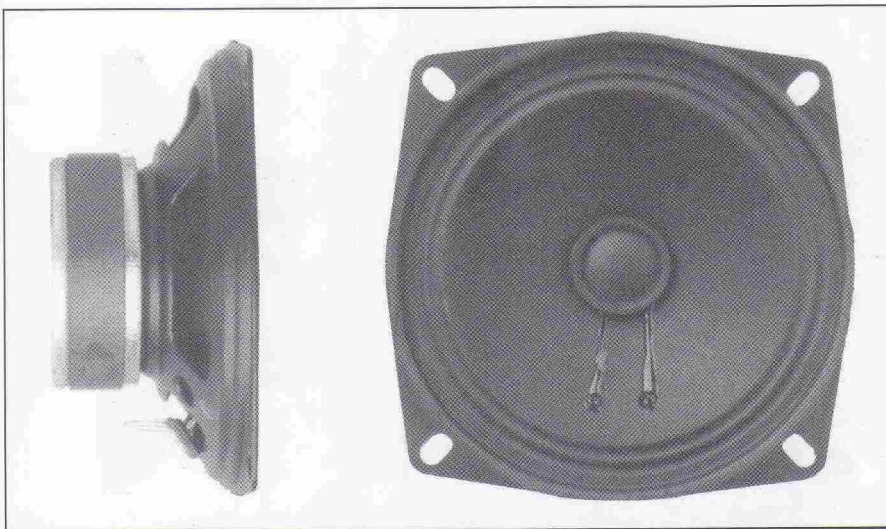

RESPONSE CURVE
 refer to page 16

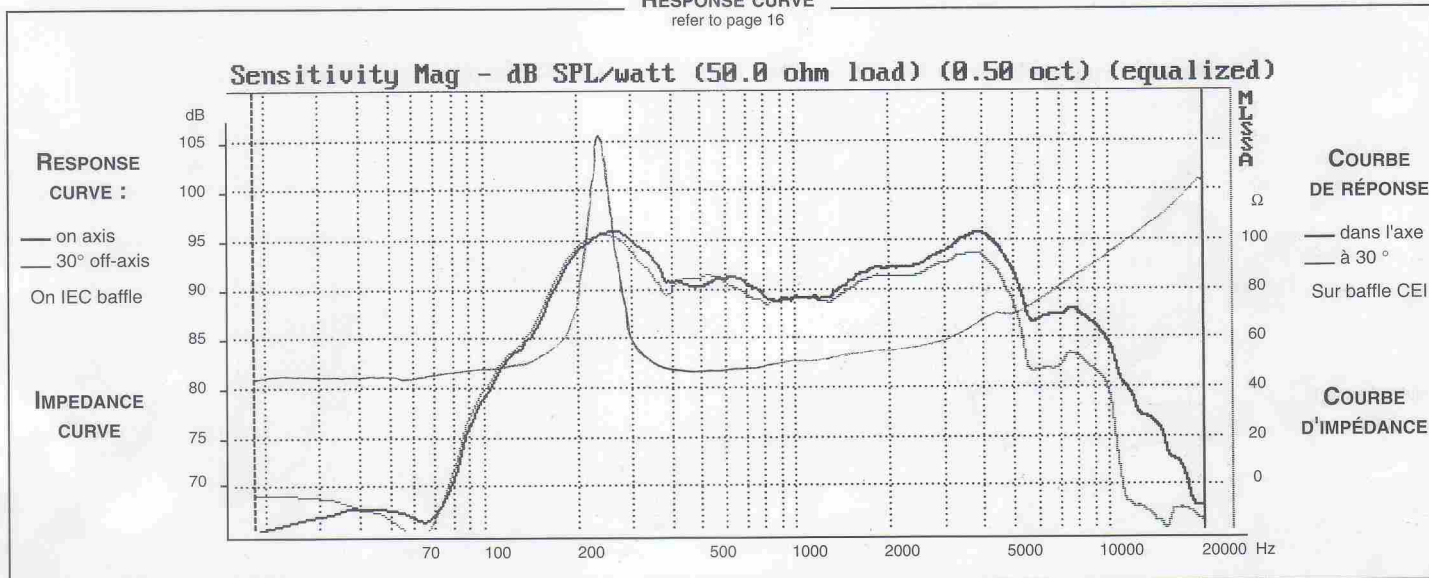

SPECIFICATIONS			
Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	50	Ω
Resonance Frequency	Fs	240	Hz
Nominal Power Handling	P	5	W
Sensitivity	E	91	dB
VOICE COIL			
Voice coil diameter	Ø	20	mm
Voice coil length	h	3,7	mm
DC Resistance	Re	46,2	Ω
Former	-	Aluminium	-
MAGNET			
Magnet dimensions	Ø x h	55 x 12	mm
Magnet weight	m	113.10 ⁻³	kg
Force factor	BL	6,6	NA ⁻¹
Linear excursion	Xmax	±1	mm
PARAMETERS			
Total Q Factor	Qts	2,31	-
Moving Mass	Mms	2.1.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	1,05.10 ⁻³	m ³
Mass of speaker	M	340.10 ⁻³	kg

This shallow stamped steel chassis (depth 42 mm) has been engineered for applications where limited space is available : Telecommunications - Public-address - electronics. Its high impedance - 50 Ω - makes it specifically suited to low currents applications.

Ce haut-parleur de faible profondeur (42 mm) est conçu pour les nombreux usages (télécommunications, public-address, électronique ...) qui requièrent un encombrement limité. Son impédance élevée - 50 Ω - le destine plus particulièrement à des systèmes courants faibles.

